
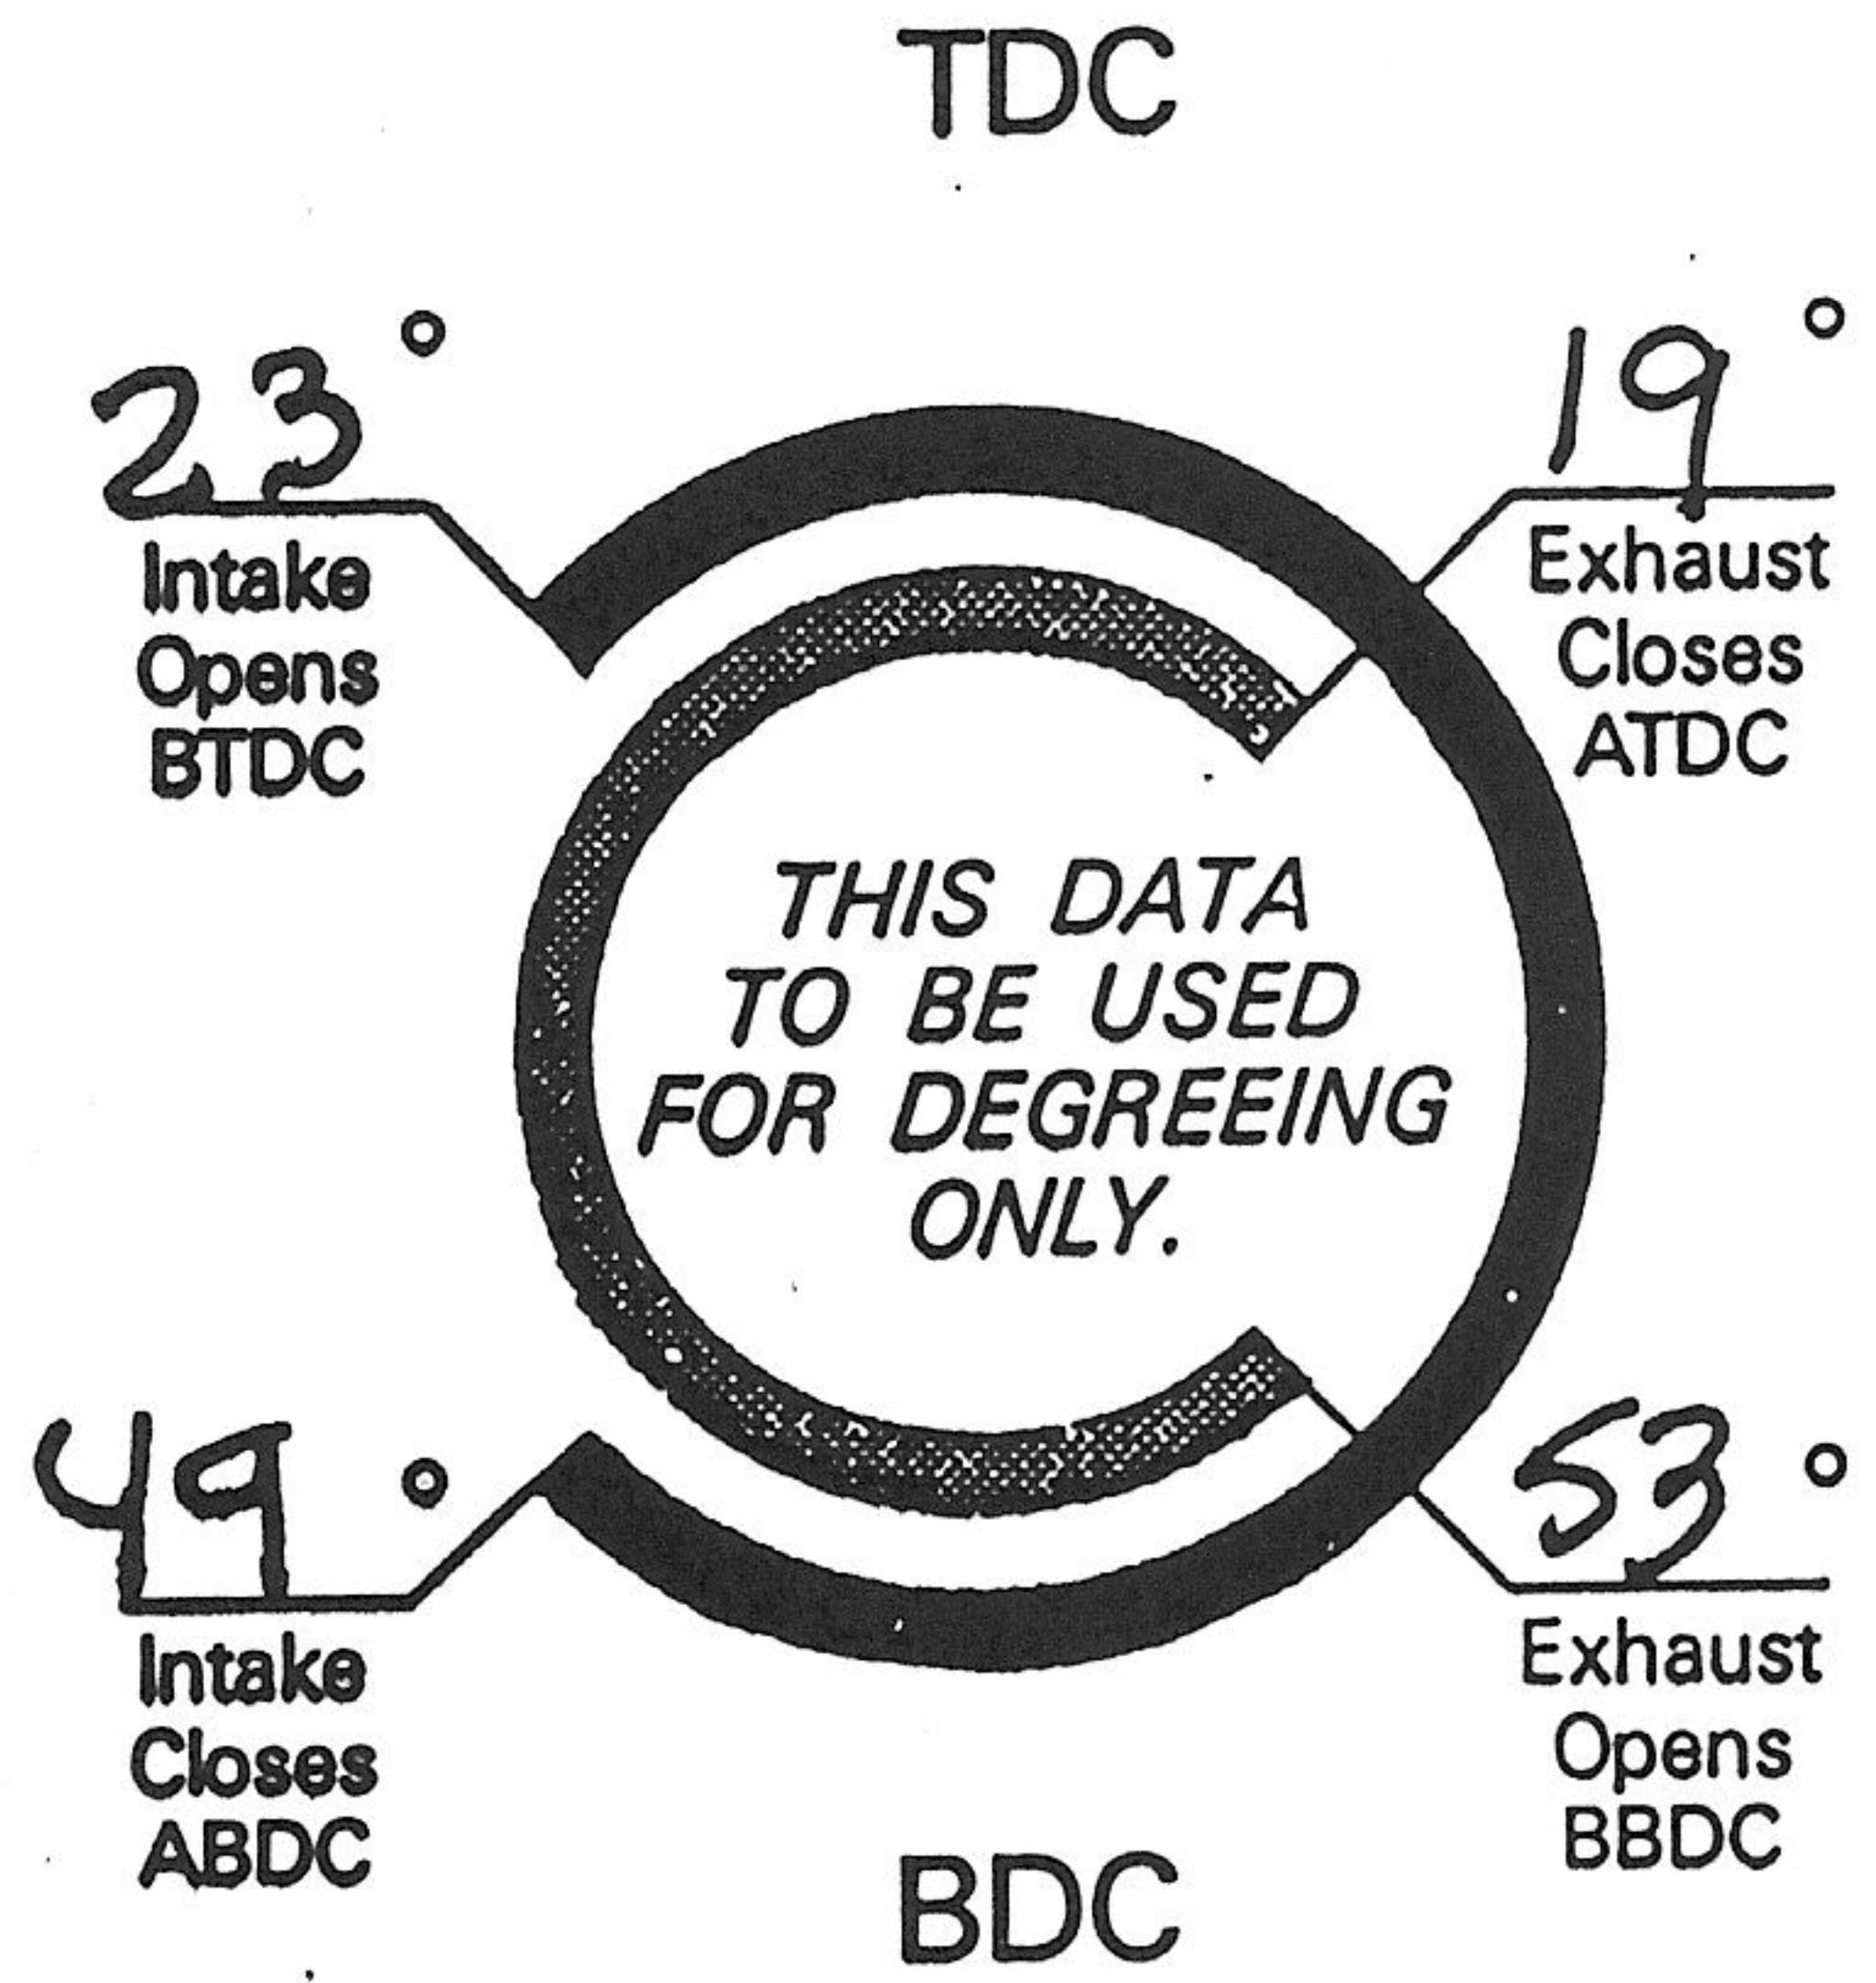


ENGINE FORD 2300
 GRIND C295-86
 ROCKER RATIO 1.65

WORK ORDER NO. _____
 LOBE SEPARATION 105
 DEGREE INTAKE LOBE TO 103
 CHECKING CLEARANCE .050" (AT TAPPET)

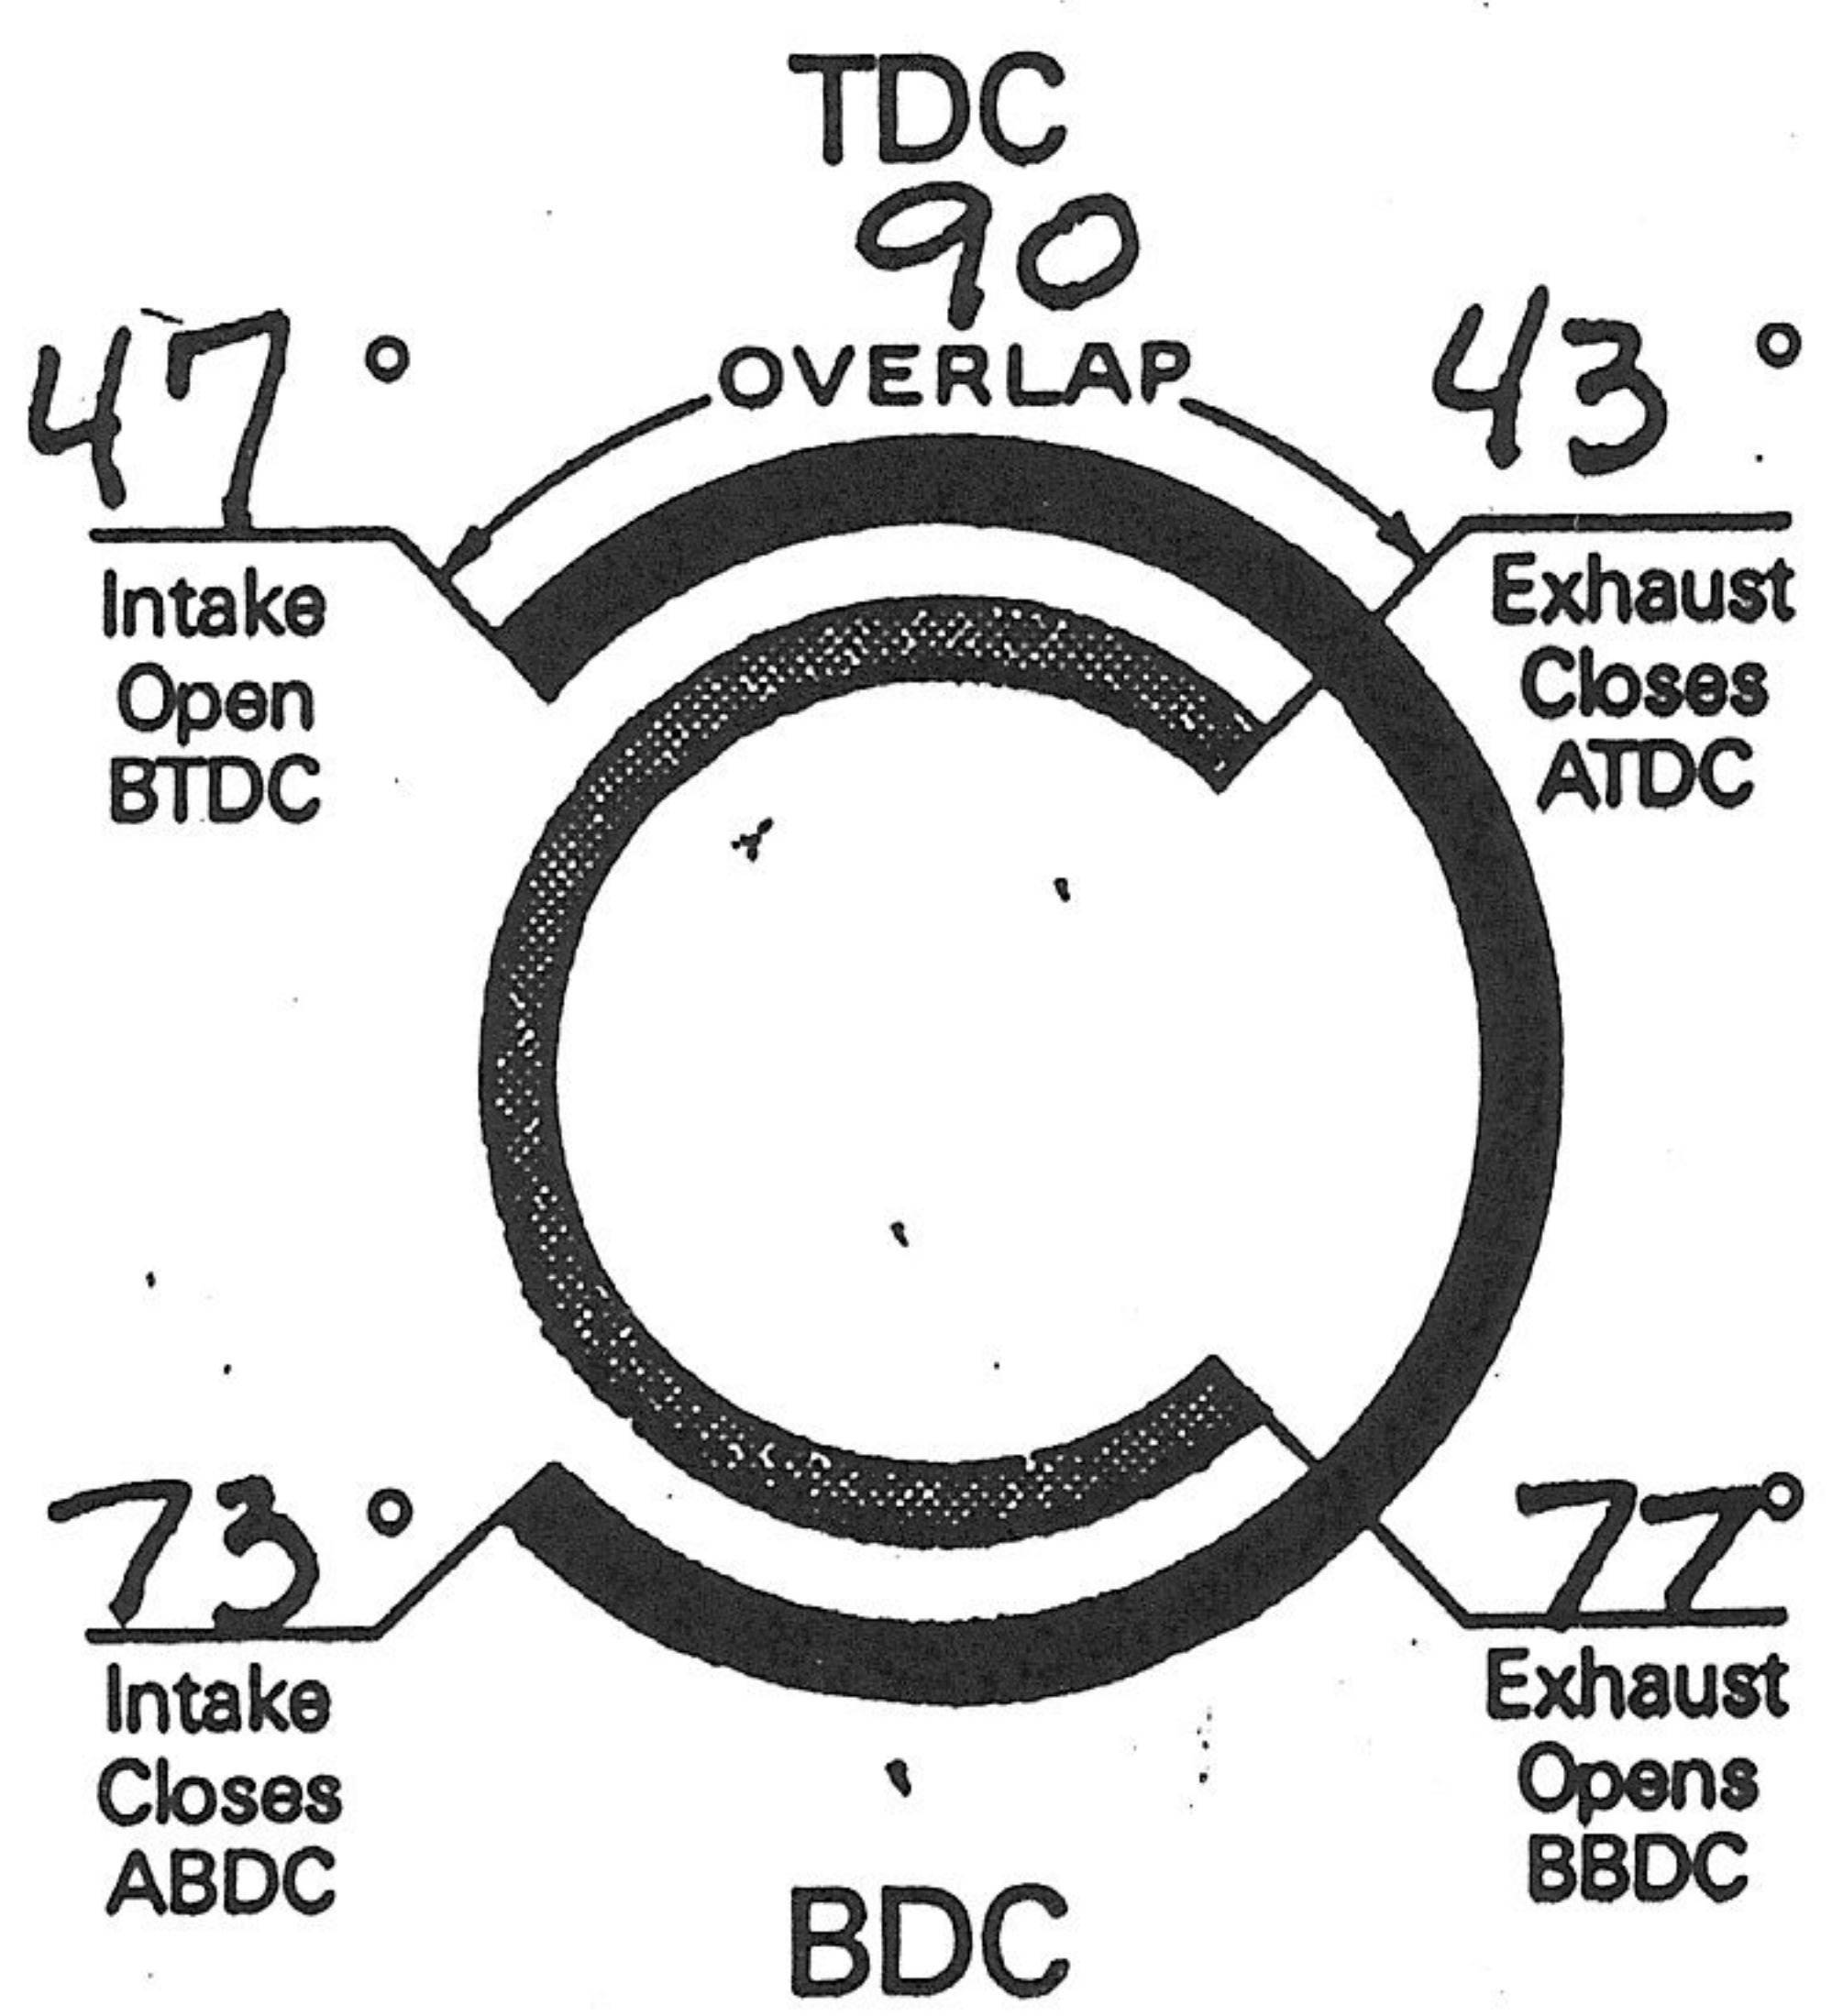

	VALVE LASH HOT-COLD	VALVE LIFT	DURATION
INTAKE	<u>008</u>	<u>489</u>	<u>300</u>
EXHAUST	<u>010</u>	<u>489</u>	<u>300</u>

	CAMLIFT	DURATION AT .050" CAMLIFT
INTAKE	<u>295</u>	<u>252</u>
EXHAUST	<u>295</u>	<u>252</u>

RECOMMENDED SPRING PRESSURE

RECOMMENDED SPRING PART NO.

_____ OPEN _____ CLOSED _____ OUTER _____ INNER